SUBMITTAL SHEET

VOLU-probe / VS STATION
RECTANGULAR CONFIGURATION
90º FLANGE

STANDARD CONSTRUCTION

Casing.	14 ga. galvanized sheetmetal, intermittent welded casing sealed with metal caulking.
Flanges.	1½" wide, 90º formed flange for all sizes up to 144" x 144".
Total and Static Pressure Sensors.	Type 6063 extruded aluminum.
Casing Depth.	6"
Operating Temperature.	Continuous operation to 200ºF.
Connection Fittings.	¼" brass compression type located on the long dimension.

OPTIONAL CONSTRUCTION

- ❑ Epoxy Polyamide Coating
  - ❑ Casing interior and sensor exteriors
  - ❑ Inside and outside of casing only
  - ❑ Sensor and manifold exteriors only
- ❑ Brass Connection Fittings
  - ❑ 3/8"compression type
  - ❑ Barbed fitting for 1/4" tube
  - ❑ Barbed fitting for 3/8" tube
- ❑ Polyurethane Coating
- ❑ Casing interior and sensor exteriors
  - ❑ Inside and outside of casing only
- ❑ Sensor and manifold exteriors only
- ❑ Non-Standard Signal Take-Off Location
- ❑ Extended Flanges. Size _____
- ❑ Bolt Holes. Size _____ Qty _____
  Bolt Center Gage _____

DIMENSIONAL SPECIFICATIONS

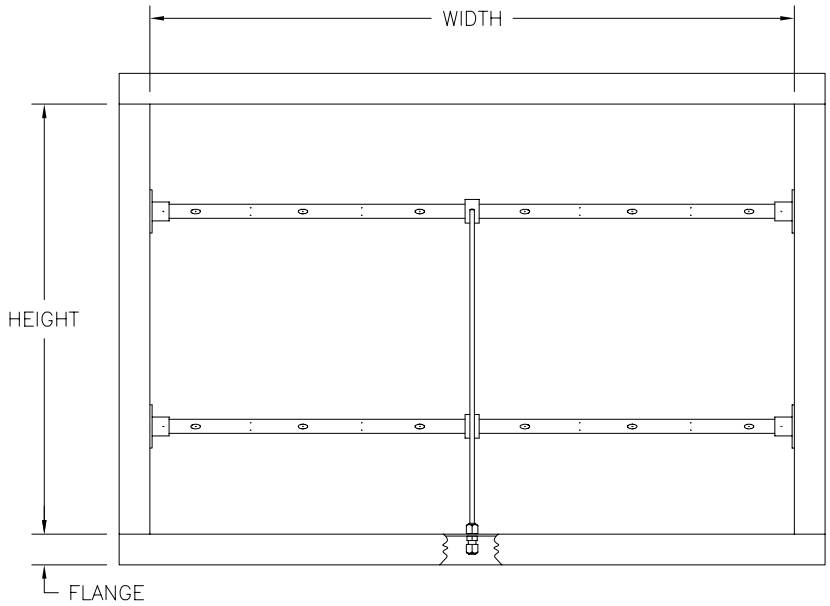

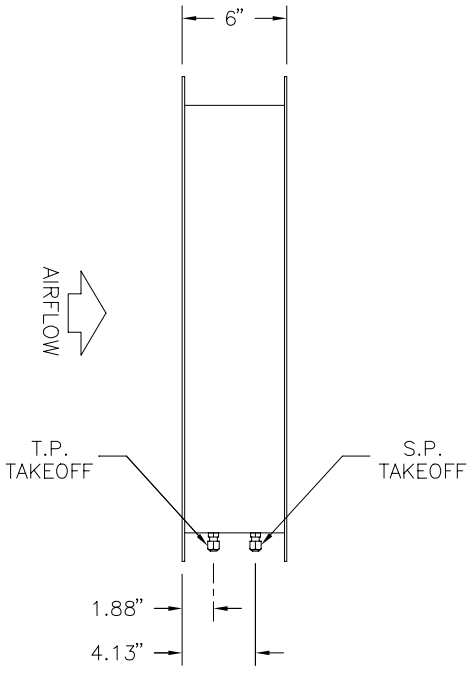

P.O. Box 6358 • Santa Rosa, CA 95406 • (707) 544-2706 • (707) 526-2825 Fax

AIR MONITOR CORPORATION