

VOLU-probe / VS Stainless Steel – Commercial

Flat Oval Configuration

90° Flange





STANDARD CONSTRUCTION

Casing. 18 gauge, Type 316 stainless steel, spot welded casing seams, sealed with silicone RTV.
Flanges. Up to 24" diameter: 1" flange, 14 ga., Type 316 stainless steel, fusion welded to casing.
 25" to 44" diameter: 1-1/2" flange, 14 ga, Type 316 stainless steel, fusion welded to casing.
 45" diameter plus: 3/16" x 2", Type 316 stainless steel barstock welded to casing.
Total and Static Pressure Sensors. Type 316 stainless steel.
Operating Temperature. Continuous operation to 200°F.
Signal Connection Fittings. 1/4" stainless steel compression type.

OPTIONS

- Signal Connection Fittings
- 3/8" compression fitting.
- Extended Flanges
- Size _____
- Bolt Holes (per flange)
- Size _____
- Qty _____

DIMENSIONAL SPECIFICATIONS

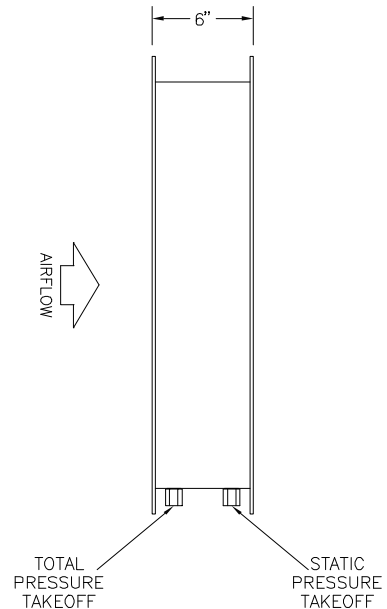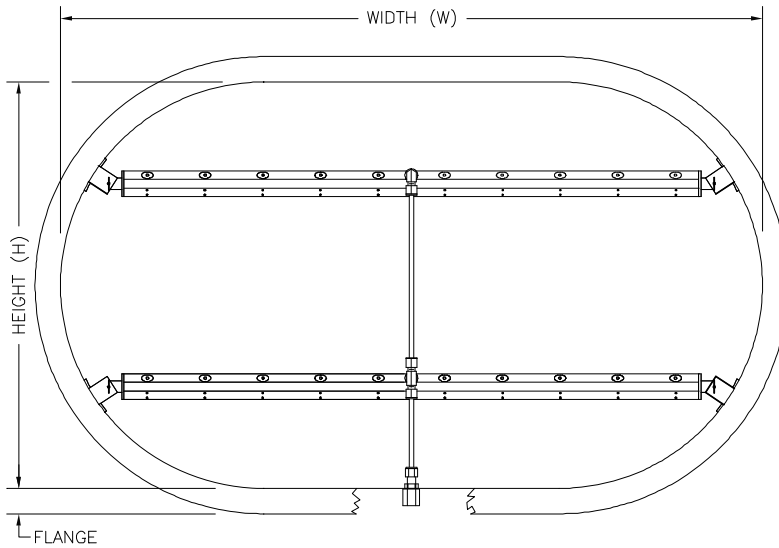

H	NUMBER OF PROBES
8" THRU 12"	1
>12" THRU 24"	2
>24" THRU 30"	2
>30" THRU 54"	3
>54" THRU 84"	4
>84" THRU 120"	5
> 120"	6

