

# VOLU-probe / VS Stainless Steel – Commercial

## Rectangular Configuration

### 90° Flange


**STANDARD CONSTRUCTION**

<b>Casing.</b>	14 gauge (0.075), Type 316 stainless steel.
<b>Flanges.</b>	1-1/2" wide, 90° formed flange for all sizes up to 144" x 144".
<b>Total and Static Pressure Sensors.</b>	Type 316 stainless steel probes. Neoprene gaskets (0 to 200°F).
<b>Operating Temperature.</b>	Continuous operation to 400°F.
<b>Signal Connection Fittings.</b>	1/4" compression stainless steel standard.

**OPTIONS**

- |   |   |  |
|---|---|--|
| <input type="checkbox"/> Signal Connection Fittings<br><input type="checkbox"/> 3/8" compression fitting. | <input type="checkbox"/> Extended Flanges.<br>Size _____<br><input type="checkbox"/> Bolt Holes (per flange)<br>Size _____<br>Qty _____ | <input type="checkbox"/> High Temperature Probe Gaskets<br><input type="checkbox"/> Silicone; 200°F to 400°F |
|---|---|--|

**DIMENSIONAL SPECIFICATIONS**

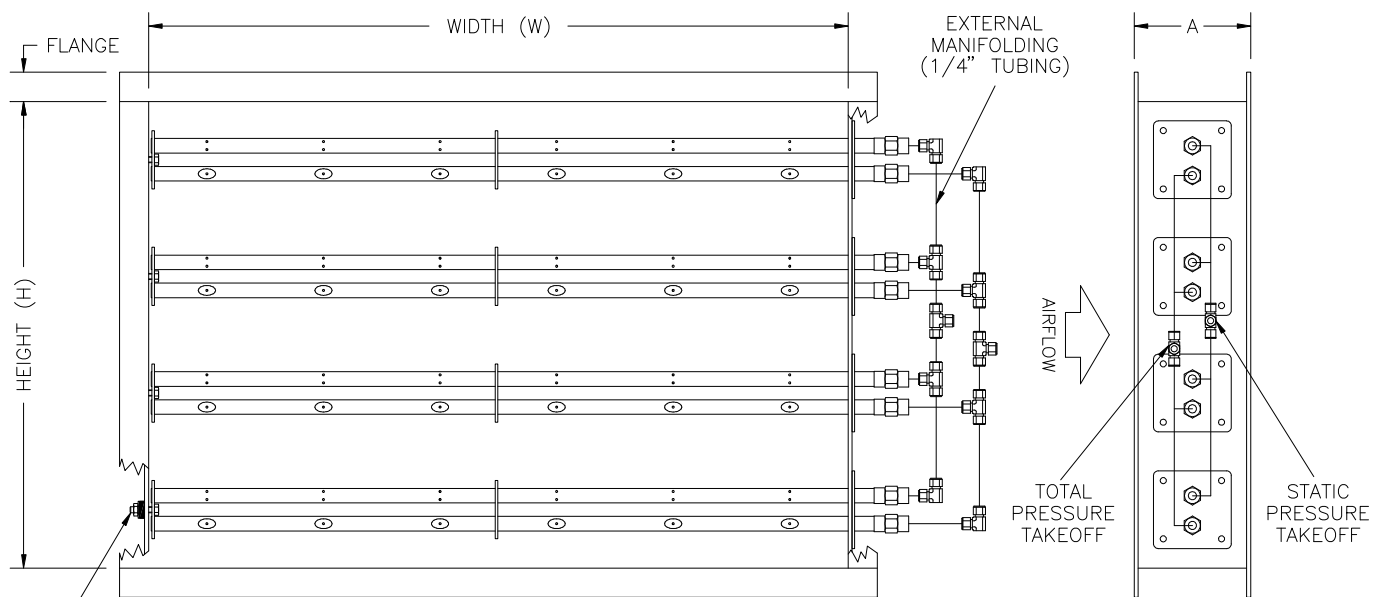

END STUD PROVIDED FOR STATION WIDTHS >18"

HEIGHT (H)	NUMBER OF PROBES
8" THRU 12"	1
>12" THRU 24"	2
>24" THRU 30"	2
>30" THRU 54"	3
>54" THRU 84"	4
>84" THRU 120"	5
>120"	6

WIDTH (W)	A
>12" THRU 24"	6.00
>24" THRU 120"	8.00

