

VOLU-probe / VS – Stainless Steel – Industrial

Rectangular Configuration

90° Flange


STANDARD CONSTRUCTION

Casing.	14 gauge, Type 316 stainless steel.
Flanges.	1-1/2" wide, 90° formed flange for all sizes up to 144" x 144".
Connection Fittings.	1/2" FPT, stainless steel probes. Neoprene gaskets (0 to 200°F).
Total and Static Pressure Sensors.	Type 316 stainless steel.
Operating Temperature.	Continuous operation to 900°F.

OPTIONS

- | | | |
|---|--|---|
| <input type="checkbox"/> External Manifolding | <input type="checkbox"/> Extended Flanges. | <input type="checkbox"/> High Temperature Probe Gaskets |
| <input type="checkbox"/> 1/4" tubing and compression type fittings. | Size _____ | <input type="checkbox"/> Silicone; 200°F to 400°F |
| <input type="checkbox"/> 1/2" tubing and compression type fittings. | <input type="checkbox"/> Bolt Holes (per flange) | <input type="checkbox"/> Ceramic Fiber; 400°F to 900°F |
| | Size _____ | |
| | Qty _____ | |

DIMENSIONAL SPECIFICATIONS

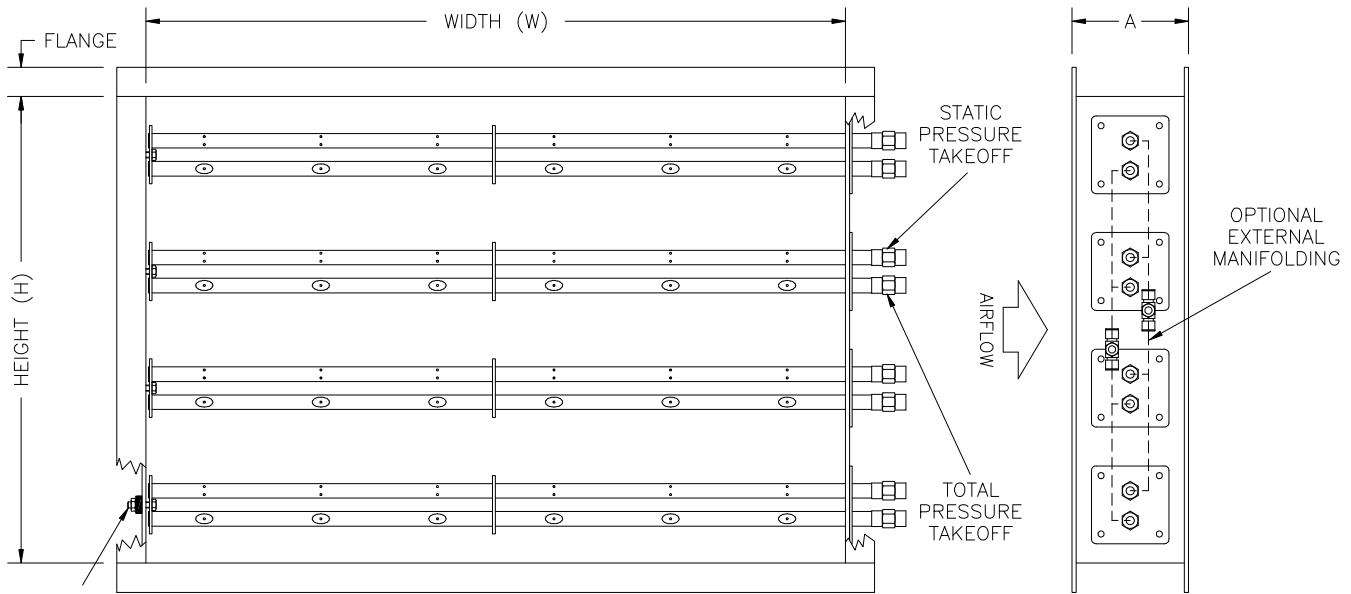

END STUD PROVIDED FOR STATION WIDTHS >18"

HEIGHT (H)	NUMBER OF PROBES
8" THRU 12"	1
>12" THRU 24"	2
>24" THRU 30"	2
>30" THRU 54"	3
>54" THRU 84"	4
>84" THRU 120"	5
>120"	6

WIDTH (W)	A
>12" THRU 24"	6.00
>24" THRU 120"	8.00

