

VOLU-probe / VS – Stainless Steel – Industrial

Rectangular Configuration

90° Flange




STANDARD CONSTRUCTION

Casing. 14 gauge, Type 316 stainless steel, continuously welded.
Flanges. 1-1/2" wide, 90° formed flange for all sizes up to 144" x 144".
Connection Fittings. 1/2" FPT, stainless steel probes. Neoprene gaskets (0 to 200°F).
Total and Static Pressure Sensors. Type 316 stainless steel.
Operating Temperature. Continuous operation to 900°F.

OPTIONS

- External Manifolding
 - 1/4" tubing and compression type fittings.
 - 1/2" tubing and compression type fittings.
- Extended Flanges.
 - Size _____
 - Qty _____
- Bolt Holes (per flange)
 - Size _____
 - Qty _____
- High Temperature Probe Gaskets
 - Silicone; 200°F to 400°F
 - Ceramic Fiber; 400°F to 900°F

DIMENSIONAL SPECIFICATIONS

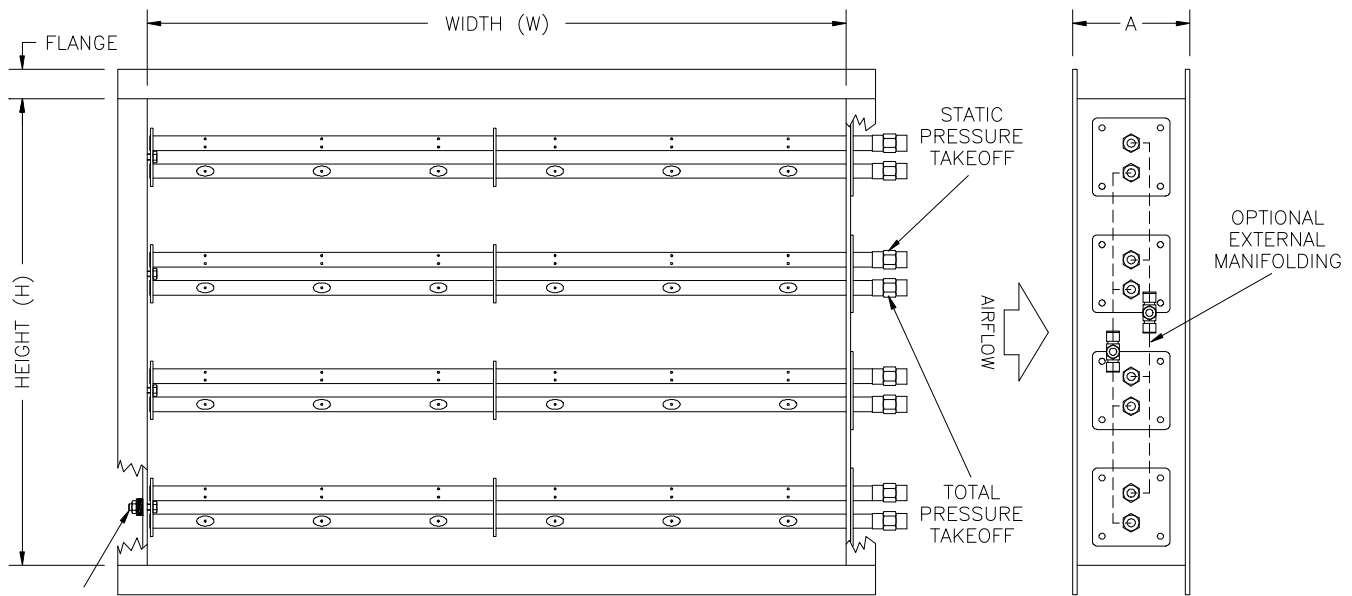

END STUD PROVIDED FOR STATION WIDTHS >18"

HEIGHT (H)	NUMBER OF PROBES
8" THRU 12"	1
>12" THRU 24"	2
>24" THRU 30"	2
>30" THRU 54"	3
>54" THRU 84"	4
>84" THRU 120"	5
>120"	6

WIDTH (W)	A
>12" THRU 24"	6.00
>24" THRU 120"	8.00

