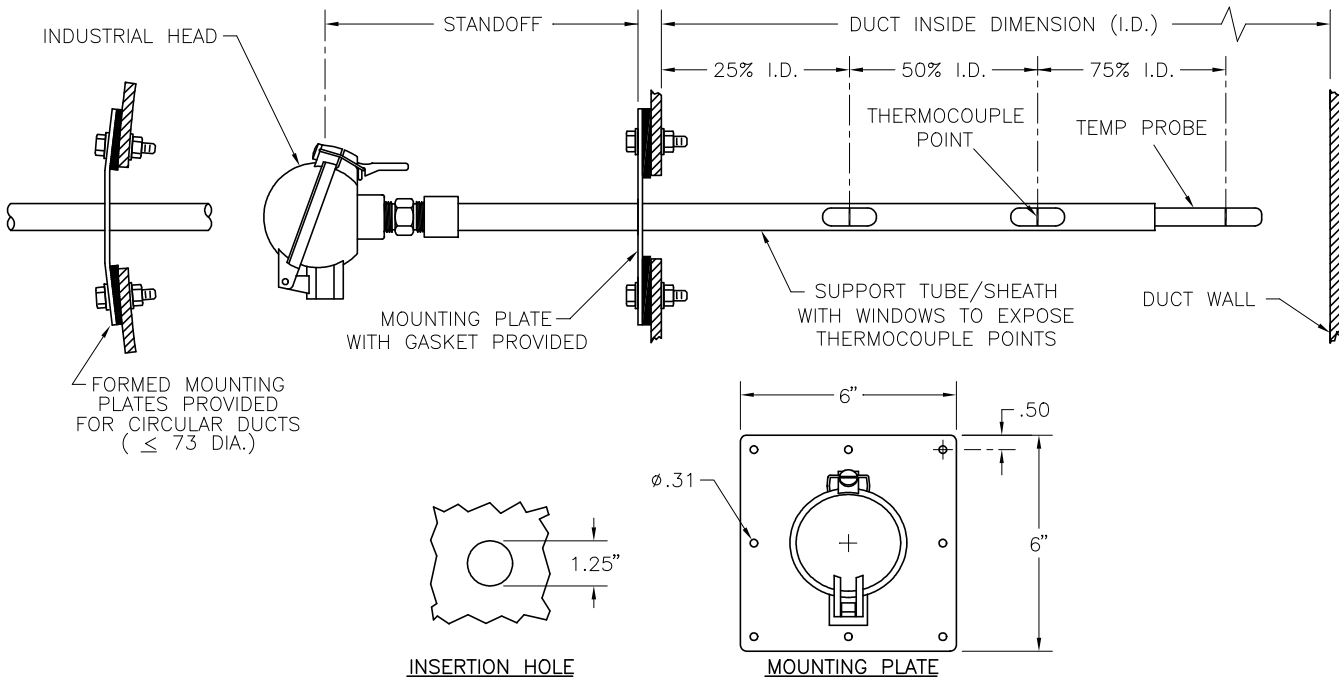


# TEMPERATURE PROBE

## MULTI-POINT

## SELF-SUPPORTED

<b>STANDARD CONSTRUCTION</b>			
<b>Temperature Element.</b>	Thermocouple, with three sensors.		
<b>Temperature Element Sheathing.</b>	½" diameter, 316 stainless steel.		
<b>Temperature J-Box.</b>	NEMA 4, cast aluminum.		
<b>Temperature Transmitter.</b>	2-wire, 4-20mA non-isolated, linearized output. (24 to 40VDC loop power required.)		
<b>Mounting Plate.</b>	6" x 6", 316 stainless steel.		
<b>Support Tube.</b>	316 stainless steel.		
<b>PERFORMANCE SPECIFICATIONS</b>			
<b>Thermocouple Accuracy.</b>	Per ANSI Circular MC 96.1 - 1982.		
<b>Temperature Transmitter Range.</b>	_____ to _____.		
<b>OPTIONS</b>			
<b>Thermocouple Type.</b>	<b>Standoff.</b>	<b>High Temperature Gasket.</b>	<b>Transmitter Type.</b>
<input type="checkbox"/> K <input type="checkbox"/> E <input type="checkbox"/> J	<input type="checkbox"/> 9" (standard) <input type="checkbox"/> Other _____	<input type="checkbox"/> Silicone, 200°F to 400°F <input type="checkbox"/> Fiber, 400°F to 900°F	<input type="checkbox"/> Optically Isolated
<b>DIMENSIONAL SPECIFICATIONS</b>			
			
* NOTE: PROBES OVER 72" LONG MAY REQUIRE A CENTER STRUCTURAL SUPPORT (BY OTHERS). CONTACT FACTORY.			