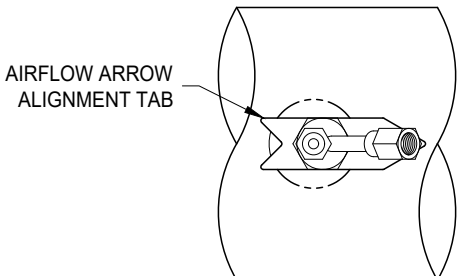
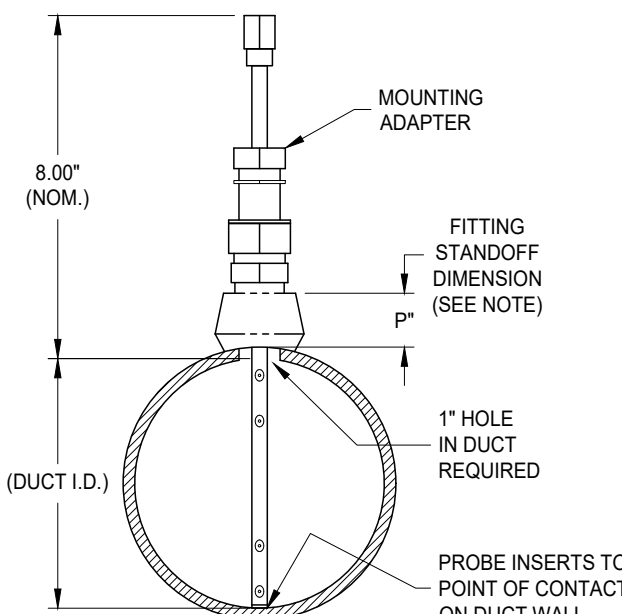
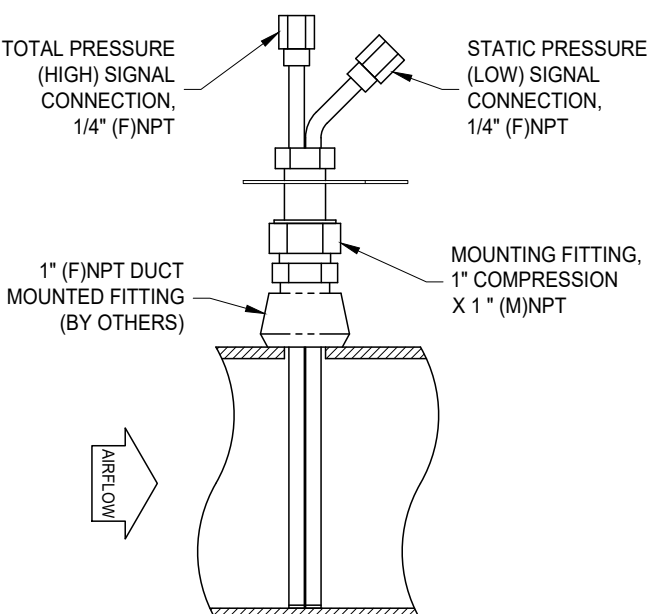


# VOLU-probe / RS

## WITH THREADED FITTING

### FOR DUCTS 2" TO 8"

<b>STANDARD CONSTRUCTION</b>	
<b>Probe:</b>	3/8" O.D. tube sensing manifolds, mounting adapter, mounting fitting, identification tag, all fabricated of Type 316 Stainless Steel.
<b>Mounting:</b>	Fitting, 1" Compression X 1" (M)NPT, Type 316 Stainless Steel
<b>Signal Connection Fittings:</b>	1/4" - 18 (F)NPT, Type 316 Stainless Steel
<b>PERFORMANCE SPECIFICATIONS</b>	
<b>Accuracy:</b>	2-3%; with application of a single probe coefficient, over a 5:1 turndown.
<b>Operating Velocity:</b>	400 - 10,000 FPM
<b>Operating Temperature:</b>	Continuous operation to 900 °F
<b>Operating Humidity:</b>	0 to 100% RH, condensing
<b>CONSTRUCTION OPTIONS</b>	
<b>Mounting Fitting</b>	
<input type="checkbox"/> 1" Compression X 3/4" (M)NPT, Type 316 Stainless Steel	
<b>DIMENSIONAL SPECIFICATIONS</b>	
<p>NOTE: FITTING STANDOFF DIMENSION 'P' MUST BE PROVIDED: _____</p>	 <p><b>TOP VIEW</b></p>
 <p><b>FRONT VIEW</b></p>	 <p><b>SIDE VIEW</b></p>

P.O. Box 6358, Santa Rosa, CA 95406 (707) 544-2706  
 www.airmonitor.com amcsales@airmonitor.com