SUBMITTAL SHEET

S.A.P. / P SHIELDED STATIC AIR PROBE PIPE MOUNT

CONSTRUCTION SPECIFICATIONS


Aluminum. Aluminum static pressure chamber and 1/2" FPT signal connection/mount.

□ Stainless Steel. Stainless steel static pressure chamber and 1/2" FPT signal connection/mount.

PERFORMANCE SPECIFICATIONS

Accuracy. Temperature. Within 1% of actual static pressure. 200°F continuous.

DIMENSIONAL SPECIFICATIONS

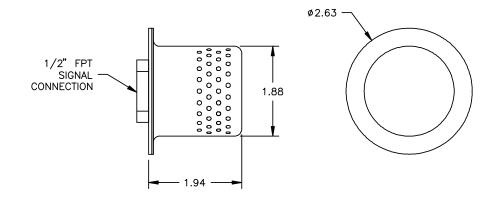



P.O. Box 6358 • Santa Rosa, CA 95406 • (707) 544-2706 • (707) 526-2825 Fax www.airmonitor.com • amcsales@airmonitor.com