

FAN-Evaluator / Stainless Steel (FAN-E/SS) – Commercial RECTANGULAR CONFIGURATION 90° FLANGE





STANDARD CONSTRUCTION

- Casing.** 14 ga. type 316 stainless steel, continuously welded casing seams.
- Flanges.** 1-1/2" wide formed flanges.
- Air Equalizer/Straightener.** 1/2" cell, 3" deep, 2 mil thick, type 304SS, bonded construction, rated to 4000 FPM and 350°F.
- Total Pressure Header.** Type 316 stainless steel tubing, welded construction.
- Static Pressure Header.** Type 316 stainless steel tubing, welded construction.
- Operating Temperature.** Continuous operation to 350°F.
- Connection Fittings.** 1/4" stainless steel compression type.

OPTIONAL CONSTRUCTION

- | | |
|---|--|
| <p>Casing / Formed Flanges</p> <p><input type="checkbox"/> 10 ga. type 316SS, continuously welded seams</p> <p>Connection Fittings</p> <p><input type="checkbox"/> Seal welded fittings</p> <p>Flanges</p> <p><input type="checkbox"/> Extended Flange Size: _____</p> <p>Signal Takeoff Location</p> <p><input type="checkbox"/> Station Long Side (standard)</p> <p><input type="checkbox"/> Station Short Side</p> | <p>Bolt Holes</p> <p><input type="checkbox"/> Customer supplied pattern</p> <p><input type="checkbox"/> AMC standard pattern</p> <p>Qty Per Flange: _____ Hole Size: _____</p> <p>Engraved Identification Tags</p> <p><input type="checkbox"/> Stainless Steel</p> <p><input type="checkbox"/> Plastic</p> |
|---|--|

DIMENSIONAL SPECIFICATIONS

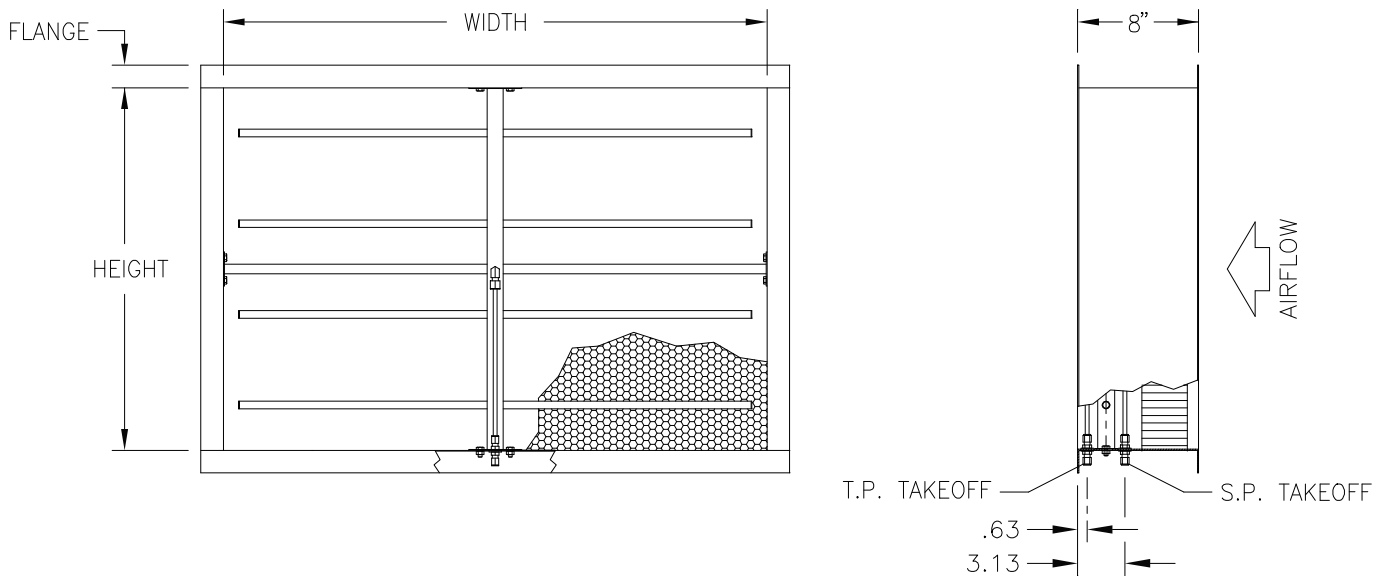

AIR MONITOR
CORPORATION

P.O. Box 6358 • Santa Rosa, CA 95406 • (707) 544-2706 • (707) 526-2825 Fax